



KNOX BOX PURCHASING AND INSTALLATION GUIDELINES

When access to or within a structure or an area is unduly difficult because of secured openings or where immediate access is required, the Fire Chief is authorized to require a key box be installed in an accessible location. The key box shall be of an approved type and shall contain keys to gain necessary access as required by the Fire Chief.

1. Visit the Knox Website at www.knoxbox.com
2. Click "BUY". When prompted, select "CALIFORNIA" and enter "Oxnard Fire Dept". Click the blue "Select Department" icon.
3. Follow the prompts to select, configure, and purchase the KnoxBox® 3200 series. Fill out the "KNOX COMPANY" application completely. **Do Not** fill in "Agency Use Only" box. This is for Fire Department use only. **Do Not** have the products delivered to the Oxnard Fire Department. (Order 3200 series only)



KnoxBox 3200 Series

Recessed Mount
Model #3275



KnoxBox 3200 Series

Surface Mount
Model #3262

****IMPORTANT NOTICE**** for most locations, only one Knoxbox is required at the front entrance, however, for larger commercial and residential properties, the Oxnard Fire Department may require a second Knoxbox at a rear location.

4. When KNOX COMPANY product(s) are delivered you are responsible for the installation.
5. Once the Knox Box is installed call (805) 385-7722 for final approval. Please ask to speak with Knox Box Coordinator.

2019 CALIFORNIA FIRE CODE SECTION 506.1

Where access to or within a structure or an area is restricted because of secured openings or where immediate access is necessary for life-saving or fire-fighting purposes, the fire code official is authorized to require a key box to be installed in an approved location. The key box shall be of an approved type listed in accordance with UL 1037, and shall contain keys to gain necessary access as required by the fire code official.



INSTALLATION GUIDELINES

1. The location of the KnoxBox needs to be in a conspicuous location near the front door.
2. The KnoxBox should be securely installed at a minimum height of 66 inches.
3. Once installed, please contact the Oxnard Fire Department at (805) 385-7722 to have property keys secured within the KnoxBox. Oxnard Fire Department requires the following:
 - a. 1 set of LABELED master keys that ensures access to all areas of the facility to include but not limited to storage rooms, office spaces and residences.
 - b. Elevator key
 - c. Key fobs if applicable
4. It is the responsibility of the owner to ensure that the secured keys are updated and maintained in the event of a lock change or other access change.

The KnoxBox 3200 is the number one high-security key lock box trusted by first responders and property owners. Store up to 10 keys to quickly gain rapid access to commercial properties.



Available in 3 colors:



FEATURES

- ✓ Stores maximum 10 keys. Access cards and small entry items may also fit in interior compartment but will reduce max key quantity.
- ✓ Built Knox-Rugged and secure: UL 1037, UL 1610, UL 1332, UL 437
- ✓ Finished with Knox-Coat® to protect four times better than standard powder coat
- ✓ Weather-resistant door gasket
- ✓ Hinged door

BENEFITS

- ✓ Allows rapid property access
- ✓ Reduces property damage
- ✓ Prevents forced entry into buildings
- ✓ Minimizes first responder injury
- ✓ Compliant to National Fire Code (NFPA, IFC, IBC)

OPTIONS

- ✓ Knox Tamper Alert connects to building's alarm system for extra security
- ✓ Mount types: Recessed and Surface
- ✓ 3 color options: Black, Aluminum, Dark Bronze

ACCESSORIES

- ✓ Multi-Purpose Switch for use on electrical doors, gates and other electrical equipment
- ✓ Recess Mounting Kit for new concrete or masonry construction
- ✓ Public Safety Labels
- ✓ Tag-Out Tamper Seals
- ✓ Key Tags
- ✓ Key Rings

ORDERING SPECIFICATIONS

To insure procurement and delivery of the KnoxBox 3200, it is suggested that following specification paragraph is used:

KnoxBox surface/recessed mount with hinged door, with/without UL Listed Knox Tamper Alert. 1/4" plate steel housing, 1/2" thick steel door with interior gasket seal and stainless steel door hinge. Box and lock UL Listed. Lock has 1/8" thick stainless steel dust cover with tamper seal mounting capability.

Exterior Dimensions: Surface Mount Body - 4"H x 5"W x 3-7/8"D
Recessed Mount Flange - 7"H x 7"W

Lock: UL Listed. Double-action rotating tumblers and hardened steel pins accessed by a biased cut key.

Finish: Knox-Coat proprietary finishing process

Color: Black, Dark Bronze or Aluminum

P/N: KnoxBox 3200 (mfr's cat. ID)

Mfr's Name: KNOX COMPANY




WEIGHT:

Surface Mount - 8 lbs
Recessed Mount - 9 lbs


DIMENSIONS:

Surface Mount Body - 4"H x 5"W x 3-7/8"D
Recessed Mount Flange - 7"H x 7"W


SURFACE MOUNT - FRONT VIEW

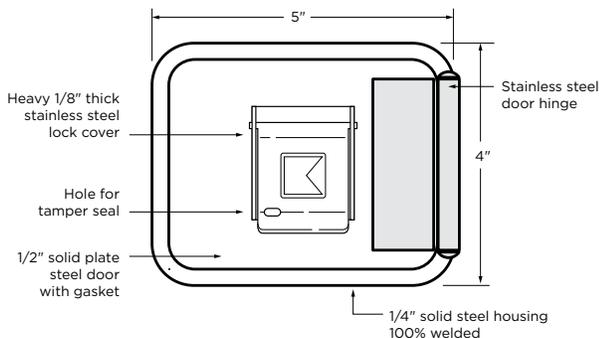

RECESS MOUNT - FRONT VIEW

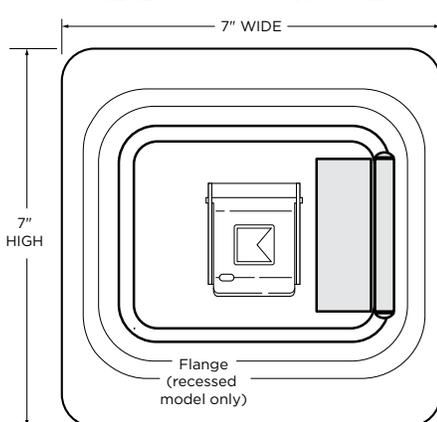



SIDE VIEW

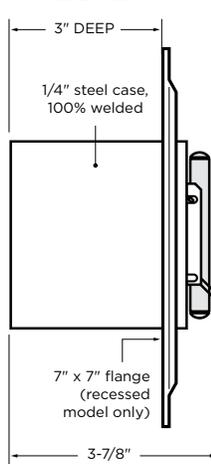

GENERAL MOUNTING INSTRUCTIONS

Suggested minimum mounting height, 6 feet above ground.

ATTENTION: KnoxBox is a very strong device that **MUST** be mounted properly to ensure maximum security and resist physical attack.

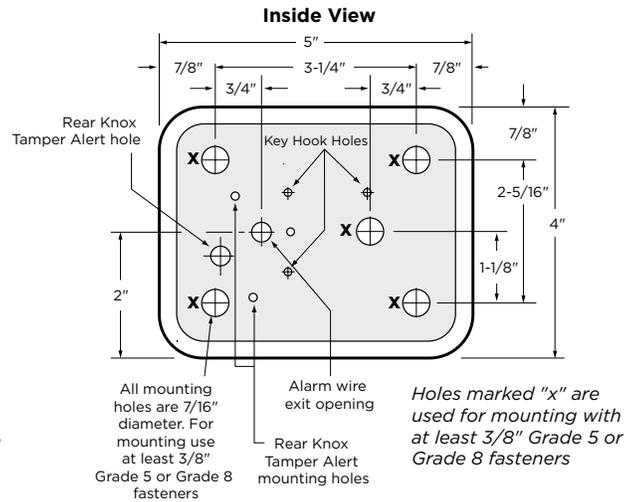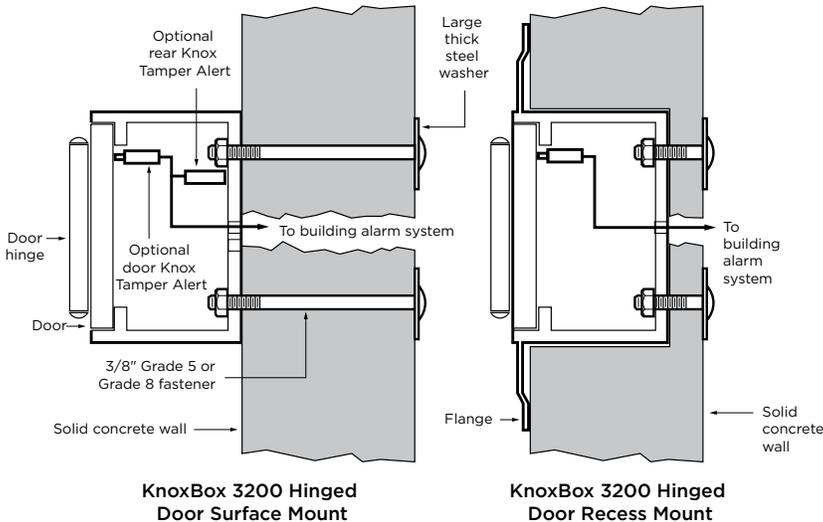


RECESS MOUNTING KIT AND INSTALLATION INSTRUCTIONS

The Recess Mounting Kit (RMK) includes shell housing and mounting hardware, which may only be used for recessed models to cast-in-place within new concrete or masonry construction. The KnoxBox is mounted into the shell housing after construction is completed.

RECESS MOUNTING KIT DIMENSIONS

Rough-in Dimensions:
6-1/2"H x 6-1/2"W x 5"D

Recessed Mounting Using Recess Mounting Kit (RMK)

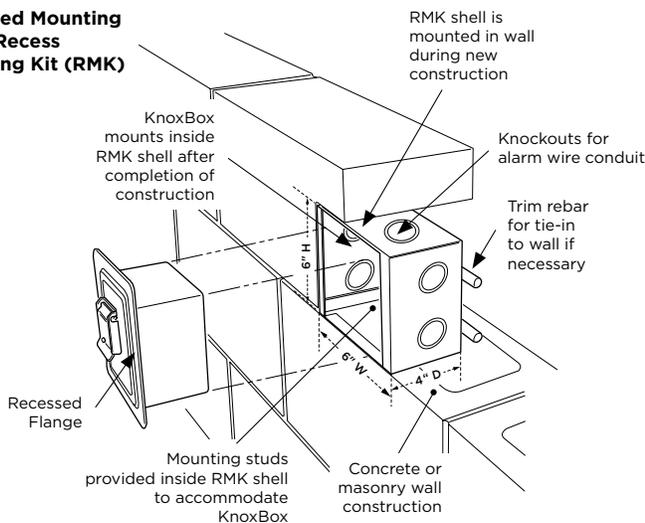

IMPORTANT:

Care should be taken to ensure the front of the Recess Mounting Kit (RMK) shell housing, including the cover plate and screw heads, is flush with the wall. The RMK must be plumbed to ensure vertical alignment of the box.

ABOUT KNOX COMPANY

Over forty years ago, a unique concept in rapid access for emergency response was born. The KnoxBox®, a high-security key lock box, was designed to provide rapid access for emergency responders to reduce response times, minimize injuries and protect property from forced entry.

Today, one revolutionary lock box has grown into a complete system providing rapid access for public safety agencies, industries, military, and property owners across the world. The Knox Company is trusted by over 14,000 fire departments, law enforcement agencies, and governmental entities.

KNOX COMPANY
1601 W. DEER VALLEY RD
PHOENIX, AZ 85027

T. 800.552.5669

F. 623.687.2290

KNOXBOX.COM
INFO@KNOXBOX.COM

The Knox Residential Box enables residents to securely provide permanent or temporary access to house keys for emergency responders. Compatible for use in homes, gated communities and apartment complexes, Knox Residential Boxes offer unmatched convenience and assurance that medical, fire and public safety personnel can gain access rapidly and safely.

Available in 3 colors:



Door Hanger
Model #1659



Surface Mount
Model #1662

WEIGHT:

Surface Mount: 6.05 lbs.
Door Hanger: 6.65 lbs.

DIMENSIONS:

Surface Mount Body: 4" H x 5" W x 2-3/4" D
Door Hanger: 4" H x 5" W x 2-3/4" D

Note: For commercial applications, see KnoxBox® 3200 or KnoxVault® 4400.

FEATURES

- ✓ Holds up to 2 keys in interior compartment
- ✓ Built Knox-Rugged and secured: UL 1037, 437, 1332, 1610
- ✓ Finished with Knox-Coat® to protect four times better than standard powder coat
- ✓ Weather-resistant door gasket

BENEFITS

- ✓ Allows emergency responders to enter property/home quickly
- ✓ Reduces forced entry property damage
- ✓ Reduces risk of injury to emergency responders and residents
- ✓ Re-securing property is easier and faster

OPTIONS

- ✓ 3 color options: Aluminum, Black, Dark Bronze
- ✓ Knox Tamper Alert connects to building's alarm system for extra security
- ✓ Mounting options: Surface mounted or door hanger for use with 1-7/8" door for temporary applications

ORDERING SPECIFICATIONS

To ensure procurement and delivery of the Knox Residential Box hinged-door model, use the following building specification paragraph:

Knox Residential Box surface or door mount. 1/4" plate steel housing, 1/4" thick steel door with interior gasket seal and stainless steel door hinge. Box and lock UL® Listed. The lock has 1/8" thick dust cover with tamper seal mounting capability.

Exterior Dimensions:

Surface mount: 4" H x 5" W x 2-3/4" D
Door hanger: 4" H x 5" W x 2-3/4" D

Lock: UL Listed. Double-action rotating tumblers and hardened steel pins accessed by a biased cut key.

Finish: Knox-Coat® proprietary finishing process

Colors: Aluminum, Black, Dark Bronze

P/N: Knox Residential Box (mfr's cat. ID)



Mfr's Name: KNOX COMPANY



GENERAL MOUNTING INSTRUCTIONS

Suggested minimum mounting height,
6 feet above ground.

ATTENTION: Knox Residential Box is a very strong device that **MUST** be mounted properly to ensure maximum security and resist physical attack.

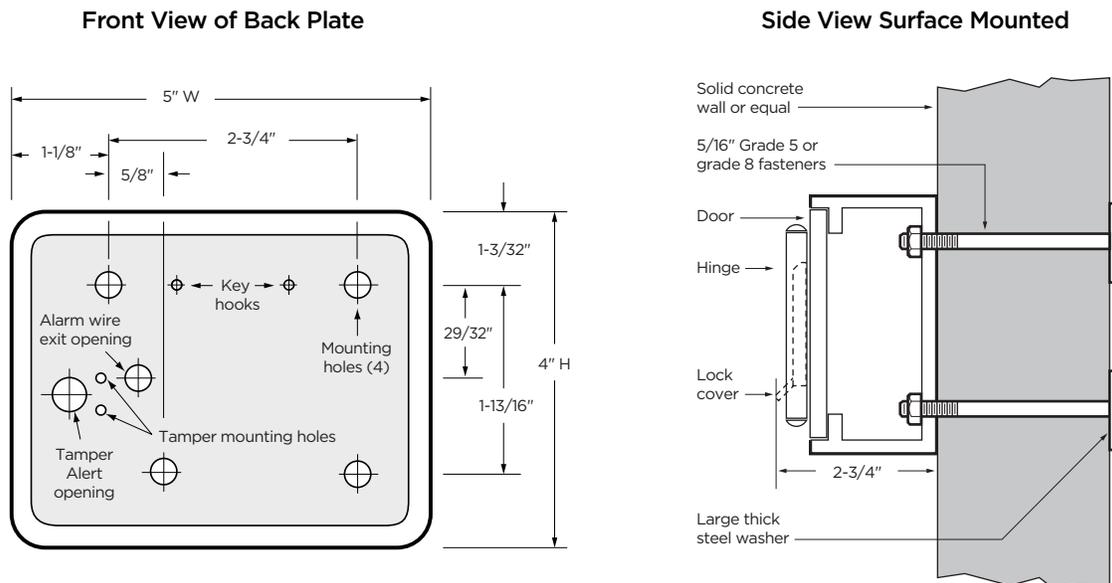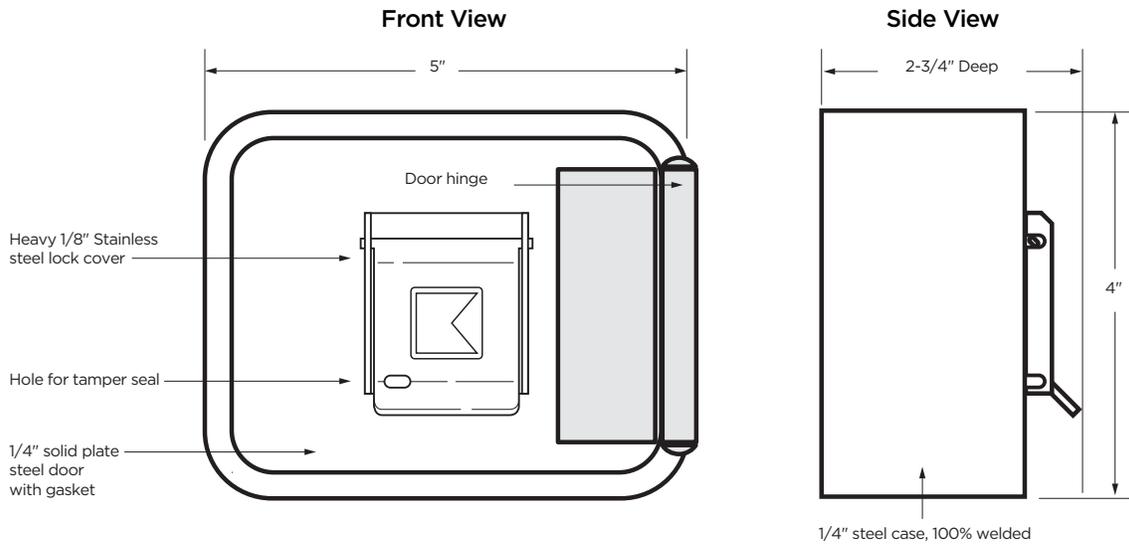

ABOUT KNOX COMPANY

Over forty years ago, a unique concept in rapid access for emergency response was born. The KnoxBox®, a high-security key lock box, was designed to provide rapid access for emergency responders to reduce response times, minimize injuries and protect property from forced entry.

Today, one revolutionary lock box has grown into a complete system providing rapid access for public safety agencies, industries, military, and property owners across the world. The Knox Company is trusted by over 14,000 fire departments, law enforcement agencies, and governmental entities.

KNOX COMPANY
1601 W. DEER VALLEY RD
PHOENIX, AZ 85027

T. 800.552.5669

F. 623.687.2290

KNOXBOX.COM
INFO@KNOXBOX.COM