



CURVE DATA: (ON CURB LINE)

R=50'
 $\Delta=19^{\circ}56'55''$
 L=17.41'
 T=8.79'

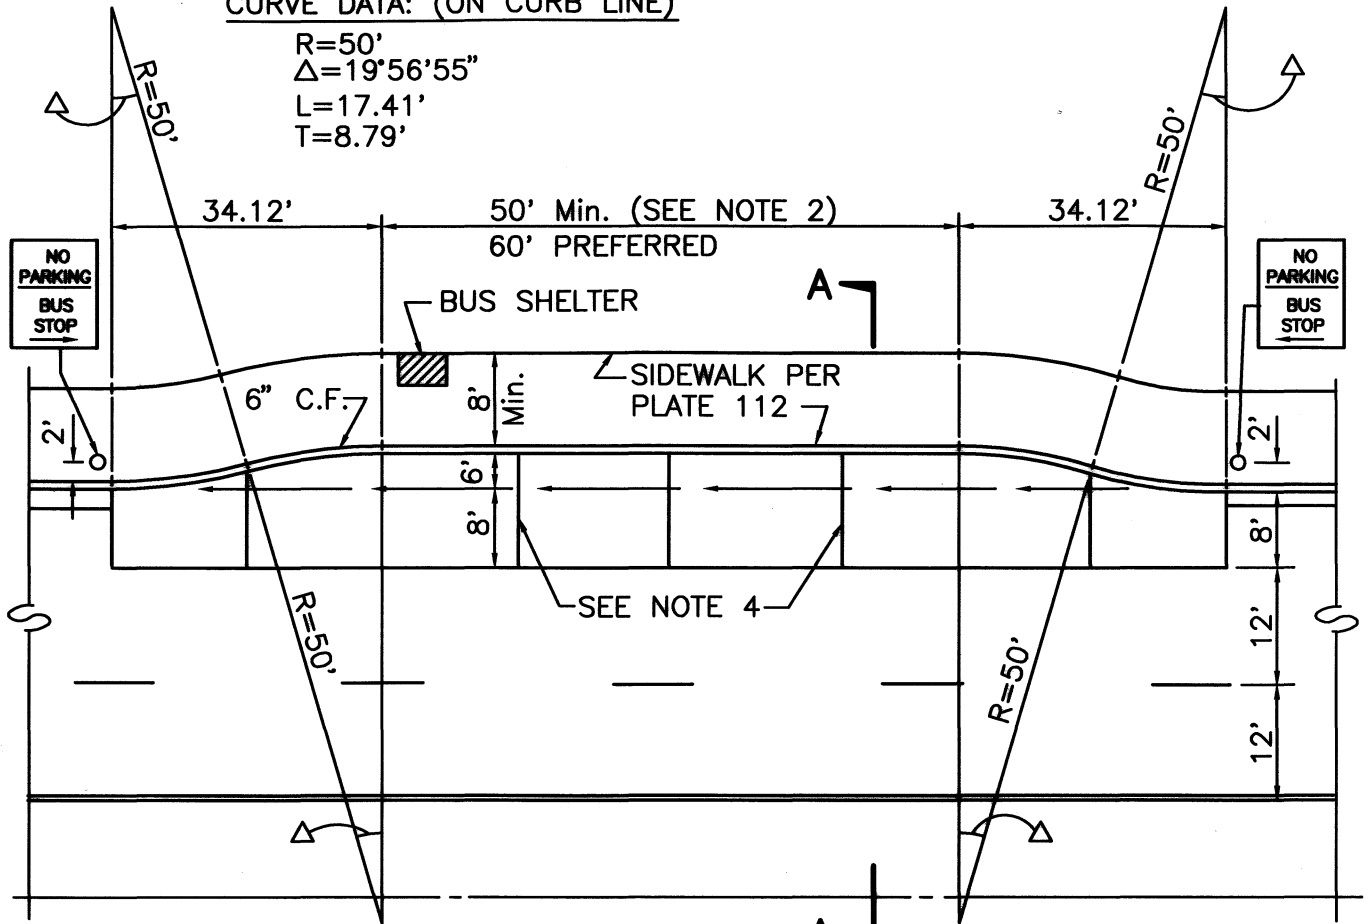

PLAN

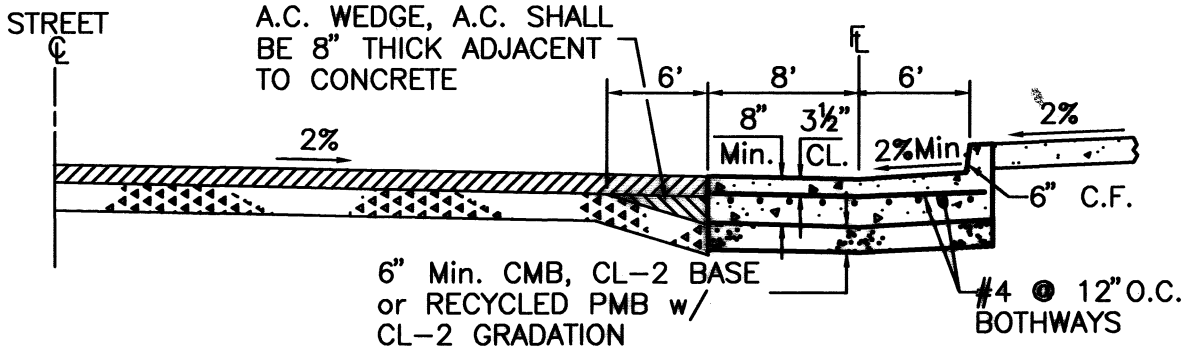

SECTION A-A

NOTES:

1. ALL CONCRETE SHALL BE CLASS 560-C-3250 WITH 2LBS OF 3/4" LONG POLYPROPYLENE FIBERS PER CUBIC YARD. STEEL SHALL BE GRADE 40.
2. FOR EACH ADDITIONAL PASS THROUGH BUS BERTH ADD 50' AND FOR EACH ADDITIONAL LAYOVER BUS BERTH ADD 80'.
3. APPLY WEED KILLER AT ALL JOINTS.
4. TURNOUT TO MATCH EXPANSION OR WEAKENED PLANED JOINTS IN CURB.

| | | |
|------|----------|------|
| REV. | APPR. BY | DATE |
| | | |

| | | |
|------|---------------|----------|
| REV. | APPR. BY | DATE |
| | | |
| | L. Balderrama | 08/10/10 |



BUS TURNOUT - FOR STREET WITH PARKING LANE

DRAWN: A. ROQUE CKD.: HUNG LE

Department of Public Works

APPR. *[Signature]*
 L. Balderrama, PE, City Engineer

STANDARD PLAN
 2002

PLATE 201

SHEET 1 OF 1